

DCLog Xpress

DCLog Xpress N3L (W128mm X H41mm X D128 mm)



IP Recording (Mirror)		
PN	Model	Channel
891-2352-V11	DCLog Xpress N3L-IP08	8Ch (Max to 24Ch)
891-2352-V17	DCLog Xpress N3L-IP16	16Ch (Max to 24Ch)
891-2352-V27	DCLog Xpress N3L-IP24	24Ch

52,000h

With its 480GB SSD, DCLog Xpress N3L can record up to 52,000 hours at G.729a. Expandable to Max 24Ch.

DCLog Xpress 1UL (W430mm X H44.4mm X D400mm)



IP Recording (Mirror)		
PN	Model	Channel
891-2302-V11	DCLog Xpress 1UL-IP08	8Ch (Max to 24Ch)
891-2302-V19	DCLog Xpress 1UL-IP16	16Ch (Max to 24Ch)
891-2302-V27	DCLog Xpress 1UL-IP24	24Ch

IP Recording (Inline)		
PN	Model	Channel
891-23T2-V11	DCLog Xpress 1UL-IP08T	8Ch (Max to 24Ch)
891-23T2-V19	DCLog Xpress 1UL-IP16T	16Ch (Max to 24Ch)
891-23T2-V27	DCLog Xpress 1UL-IP24T	24Ch

Analog Recording (Tapping)		
PN	Model	Channel
891-2172-A11	DCLog Xpress 1UL-A08	8Ch (Max to 24Ch)
891-2172-A19	DCLog Xpress 1UL-A16	16Ch (Max to 24Ch)
891-2172-A27	DCLog Xpress 1UL-A24	24Ch

120,000h (IP)
240,000h (Analog)

With its 1TB HDD RAID-1, DCLog Xpress 1UL can record up to 240,000 hours at G.729a. Expandable to Max 24Ch.


OS

Pre-installed with Linux CentOS-7 64bit operating system. Reliable performance at affordable price


Pre-installed with Oracle Database 11g Express Edition. Reliable performance at affordable price

Typical Application


IP Recording (Mirror)

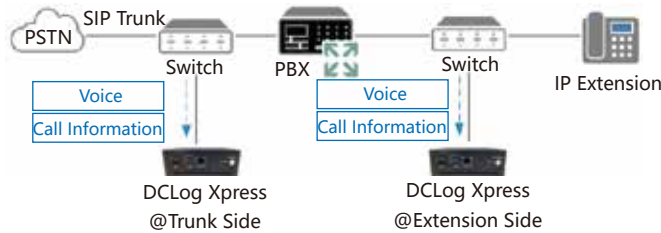

IP Recording (Inline)

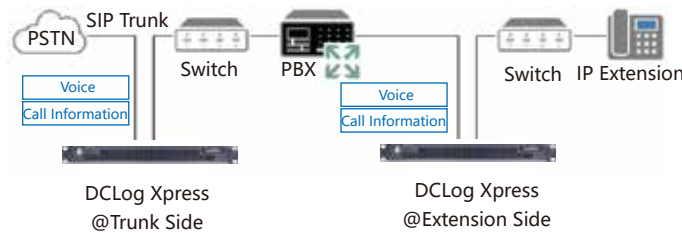

Analog Extension/Trunk Recording(Tapping)

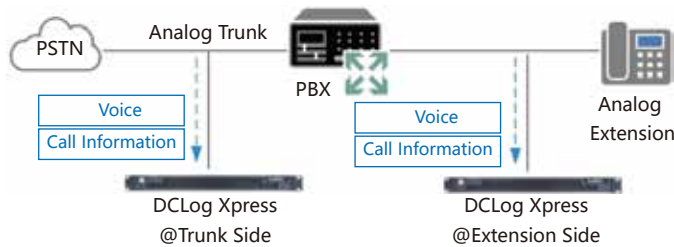

120,000h (IP)
240,000h(Analog)

CentOS

Linux

DupliCALL

可扩充/磁盘阵列/
固态硬盘
Expandable/RAID/
SSD

DCLog Xpress Call Recording System

支持SIP中继 / IP话机 / 模拟话机录音
Supports SIP Trunk / IP Extension / Analog Line Recording

预装Linux CentOS-7 64位操作系统

Pre-installed with Linux CentOS-7 64bit OS

可扩充支持8-24Ch 并发录音
Expandable up to concurrent 8-24Ch

磁盘阵列, 支持统一存储查询
RAID, Supports Central Storage & Search

DCLog Xpress

DCLog Xpress N3L (W128mm X H41mm X D128 mm)



IP录音 (镜像端口)		
PN	型号	线路数
891-2352-V11	DCLog Xpress N3L-IP08	8Ch (可扩至24Ch)
891-2352-V17	DCLog Xpress N3L-IP16	16Ch (可扩至24Ch)
891-2352-V27	DCLog Xpress N3L-IP24	24Ch

52,000h

DCLog Xpress N3L 机型标准配置480GB SSD, 单机最大录音时长为52,000小时(G.729a), 最大可扩至24路。

DCLog Xpress 1UL (W430mm X H44.4mm X D400mm)



IP录音 (镜像端口)		
PN	型号	线路数
891-2302-V11	DCLog Xpress 1UL-IP08	8Ch (可扩至24Ch)
891-2302-V19	DCLog Xpress 1UL-IP16	16Ch (可扩至24Ch)
891-2302-V27	DCLog Xpress 1UL-IP24	24Ch

IP录音 (在线连接)		
PN	型号	线路数
891-23T2-V11	DCLog Xpress 1UL-IP08T	8Ch (可扩至24Ch)
891-23T2-V19	DCLog Xpress 1UL-IP16T	16Ch (可扩至24Ch)
891-23T2-V27	DCLog Xpress 1UL-IP24T	24Ch

模拟录音 (高阻并线)		
PN	型号	线路数
891-2172-A11	DCLog Xpress 1UL-A08	8Ch (可扩至24Ch)
891-2172-A19	DCLog Xpress 1UL-A16	16Ch (可扩至24Ch)
891-2172-A27	DCLog Xpress 1UL-A24	24Ch

120,000h (IP)

240,000h (Analog)

DCLog Xpress 1UL机型标准配置1TB HDD RAID-1, 单机最大录音时长为240,000小时(G.729a), 最大可扩至24路。

OS

预装Linux CentOS-7 64位操作系统, 不仅使系统具有更稳定可靠的性能, 也为数据安全提供了更强大的保护。

预装Oracle Database 11g Express Edition数据库, 使得录音数据的管理更加可靠。

典型应用

IP录音 (镜像端口)



IP录音 (在线连接)



模拟线路录音 (高阻并线)



DupliCALL安录

上海安录系统集成有限公司是专业的行业合规录音、录像、录屏、录屏解决方案提供商。其独特创新的录音产品包括：统一通讯录音/录像、人工智能行为分析、录屏/监屏、Microsoft SFB / Lync录音等。

公司拥有强大的自主研发能力, 分别在上海、北京、成都设立了研发中心, 针对金融保险、统一通讯、公共安全、轨道交通等行业推出多个创新解决方案, 结合智能行为分析, 以及独创的语音识别率提升技术, 可满足大数据时代多种场景的应用需求。



Tel: +86 21 5187 7890

Fax: +86 21 6456 8509

上海市闵行区泰虹路268弄万科时一区T4楼607室 (201107)

www.duplicall.com