

▶ DCLog Xpress

DCLog Xpress 1UM For Analog Recording (Tapping) (W430mm X H44.4mm X D400mm)



PN	Model	Channel
891-2172-A08	DCLog Xpress 1UM-A08	8Ch(Not Expandable)
891-2172-A16	DCLog Xpress 1UM-A16	16Ch(Not Expandable)
891-2172-A24	DCLog Xpress 1UM-A24	24Ch(Not Expandable)

DCLog Xpress 1UM For IP Recording (Mirror)



PN	Model	Channel
891-2302-V08	DCLog Xpress 1UM-IP08	8Ch(Not Expandable)
891-2302-V16	DCLog Xpress 1UM-IP16	16Ch(Not Expandable)
891-2302-V24	DCLog Xpress 1UM-IP24	24Ch(Not Expandable)

120,000h (IP) With its 1TB HDD, DCLog Xpress 1UL can record up to 240,000 hours at G.729a.
240,000h (Analog)

QUALITY PRODUCT

All DCLog Xpress call loggers make use of industrial-grade single-board computers to house Linux CentOS 7.0 64bit and Oracle 11g 64bit Express Edition. They also come with high-performance DSP boards and DupliCALL in-house engineered software.

MULTI-LINGUAL SUPPORT

The DCLog Xpress webpage is HTML5-compliant and comes in 5 different languages. Connect via a standard web browser and choose from English, Simplified Chinese, Traditional Chinese, Japanese, or Korean.

SEARCH OPTIONS AND BATCH DOWNLOADS

Users can quickly search and find particular recordings by selecting account(s), date-time, dial string, and Caller ID from the search option web screen. A quick search option is available for speedy operation. Click the recording of interest to playback the audio, or check its box to download or E-mail the sound file to your PC.

▶ OS




Pre-installed with Linux CentOS-7 64bit operating system. Reliable performance at affordable price




Pre-installed with Oracle Database 11g Express Edition. Reliable performance at affordable price

▶ Typical Application

IP Recording (Mirror)

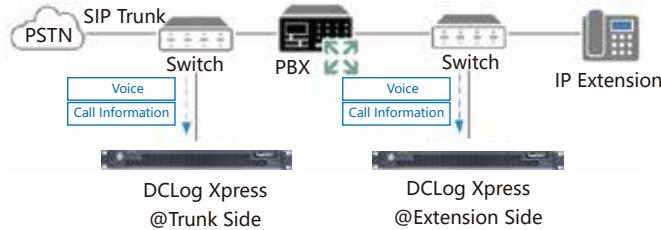

Analog Extension/Trunk Recording(Tapping)

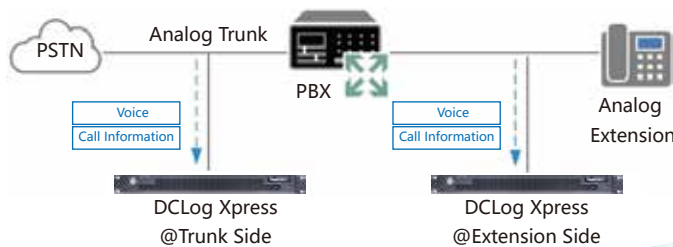

DCLog Xpress Call Recording System

支持SIP中继 / IP话机 / 模拟话机录音
Supports SIP Trunk / IP Extension /
Analog Line Recording

预装Linux CentOS-7 64位操作系统
Pre-installed with Linux CentOS-7 64bit OS

单机支持8Ch、16Ch、24Ch 并发录音
Supports Concurrent 8Ch、16Ch、24Ch

支持统一存储查询
Support Central Storage & Search

DCLog Xpress

DCLog Xpress 1UM 模拟线路录音 (高阻并线)

(W430mm X H44.4mm X D400mm)



PN	型号	线路数
891-2172-A08	DCLog Xpress 1UM-A08	8Ch (单机不支持扩容)
891-2172-A16	DCLog Xpress 1UM-A16	16Ch (单机不支持扩容)
891-2172-A24	DCLog Xpress 1UM-A24	24Ch (单机不支持扩容)

DCLog Xpress 1UM IP录音 (镜像端口)



PN	型号	线路数
891-2302-V08	DCLog Xpress 1UM-IP08	8Ch (单机不支持扩容)
891-2302-V16	DCLog Xpress 1UM-IP16	16Ch (单机不支持扩容)
891-2302-V24	DCLog Xpress 1UM-IP24	24Ch (单机不支持扩容)

120,000h (IP)
240,000h (Analog)

DCLog Xpress 1UM机型标准配置1TB HDD, 单机最大录音时长为240,000小时(G.729a)。

高品质产品

DCLog Xpress使用工业级单板计算机, 搭载Linux CentOS 7.0 64bit操作系统和Oracle Database 11g Express Edition数据库, 选配了具有高可靠性的DSP语音板(模拟线路录音), 预装了我们自主研发的录音软件。

多语言支持

基于HTML5浏览器技术, 用户界面支持5种语言, 包括简体中文、繁体中文、英文、日文和韩文。客户通过浏览器登录时可以选择要使用的语言。

多种查询和下载方式

多种查询方式供客户选择, 比如按照分机、时间、主叫号码等查询, 当找到想要查听的录音文件后, 可以通过单个或者批量下载的方式获得录音文件。

OS




预装Linux CentOS-7 64位操作系统, 不仅使系统具有更稳定可靠的性能, 也为数据安全提供了更强大的保护。




预装Oracle Database 11g Express Edition数据库, 使得录音数据的管理更加可靠。

典型应用

IP录音 (镜像端口)

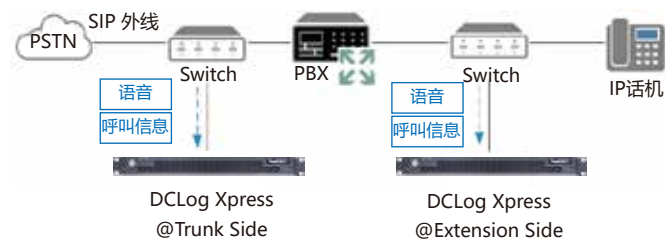

模拟线路录音 (高阻并线)

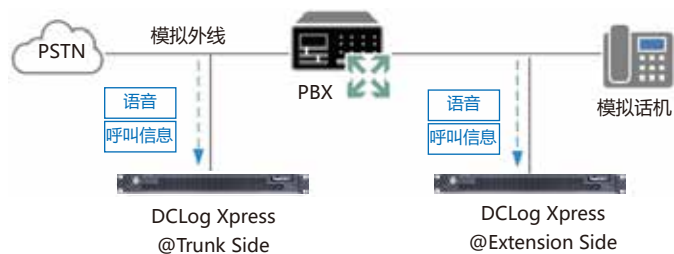

DupliCALL安录

上海安录系统集成有限公司是专业的行业合规录音、录像、录屏、录屏解决方案提供商。其独特创新的录音产品包括: 统一通讯录音/录像、人工智能行为分析、录屏/监屏、Microsoft SFB / Lync录音等。

公司拥有强大的自主研发能力, 分别在上海、北京、成都设立了研发中心, 针对金融保险、统一通讯、公共安全、轨道交通等行业推出多个创新解决方案, 结合智能行为分析, 以及独创的语音识别率提升技术, 可满足大数据时代多种场景的应用需求。



Tel: +86 21 5187 7890

Fax: +86 21 6456 8509

上海市闵行区泰虹路268弄万科时一区T4楼607室 (201107)

www.duplicall.com